

# MACfilm F 1012


- GENERAL INTRODUCTION
- PRODUCT DESCRIPTION
- TYPICAL APPLICATION
- CHARACTERISTICS
- RESISTANCE
- SHELF LIFE
- APPROVAL

**MACfilm**

- is a transfer or unsupported pressure sensitive adhesive system for assembling purposes. The adhesives used are acrylic polymer or synthetic rubber based formulations
- is protected by one or two silicone coated release liners.

**MACfilm F 1012** is a free film of rubber based adhesive. It offers good tack and peel properties.

**MACfilm F 1012** is produced in self-wound format on a kraft release liner.

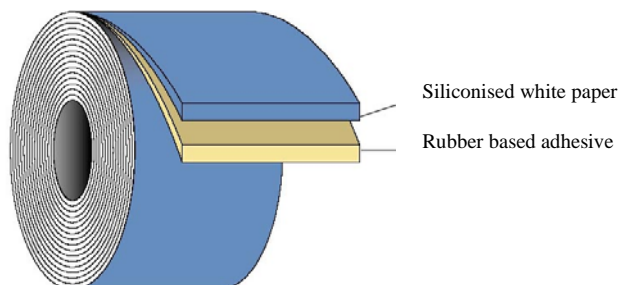

For applications where good tack and adhesion are required.

Adhesion with Substrates			
Metal / Aluminium	High	Textile/Cotton	High
Glass / Ceramics	High	Rubber/EPDM	HighMedium
Painted Surface	Medium	Acrylic/PET	High
Wood/Board/Paper	Medium	Polystyrene	High
Soft PVC	Low	PP/PE/PS	High
Rigid PVC	High	Smooth substrate	High
PC/ABS	High	Rough substrate	Medium

Resistant to water, detergents and alcohol. Low resistance to plasticizers and low outdoor resistance. Not recommended for use in contact with aliphatic or aromatic hydrocarbons. For further technical advice, please consult with MACtac.

2 years when stored at 15 to 25°C and +/- 50 % relative humidity.

The adhesive used has been approved for direct contact with dry or humid food. (Not suitable for direct contact with fat ). Approval certificate ISEGA 27869 U 09.

**ADHESIVE DATA**

	TYPICAL VALUES (*)	TEST METHOD
Quick Tack (N/25mm) on stainless steel	17	FTM 9
Peel 180°- (N/25mm) on stainless steel - after 20 minutes	20	FTM 1
Shear on stainless steel 1kg-25 mm x 25mm (hours)	50	FTM 8

**CARRIER DATA**

CARRIER FREE		
--------------	--	--

**TEMPERATURE RESISTANCE**

Minimum application temperature	+ 5°C
End-use temperature range (**)	- 40°C to + 80°C

(\*\*) when working under extreme T° of this range , please contact Mactac for further information.

**RELEASE LINER**

Silicone paper white of 60 gr/sqm	ISO 536
Thickness (Adhesive)	18 µ
	ISO 534

(\*) Values given are typical and are not necessarily for use in specifications.

**IMPORTANT NOTICE**

All MACtac products are subject to careful quality control throughout the manufacturing process and are warranted to be of merchantable quality and free from manufacturing defects. Published information concerning MACtac products are based upon research which the Company believes to be reliable but such information do not constitute a warranty. Because of the variety of possible uses for MACtac products and the continuing development of new uses, the purchaser should carefully consider the fitness and performance of the product for each intended use and the purchaser assumes all risks in connection with such use. Seller shall not be liable for damages in excess of the purchase price of the product or for incidental or consequential damages. All specifications are subject to change without prior notice.

